



MATEKSYS

FLIGHT CONTROLLER H743-WLite

QUICK START GUIDE

MCU: STM32H743VIH6, 480MHz, 2MB Flash

IMU: ICM42688-P (SPI1)

Baro: DPS310 (I2C2)

OSD: AT7456E (SPI2)

Blackbox: MicroSD card slot (SDIO)

7x Uarts (1,2,3,4,6,7,8) with built-in inversion

13x PWM outputs

2x I2C

1x CAN

6x ADC (VBAT, Current, RSSI, Analog AirSpeed, VB2, CU2)

1x JST-GH_4pin connector for I2C2

1x JST-GH_4pin connector for CAN

1x JST-SH_6pin connector for external USB and buzzer

Dual Camera Inputs switch

9V(12V) for VTX power switch

6.8~30V DC IN (2~6S LiPo)

High-precision Current Sense 220A Range

BEC 5V 2A for FC

BEC 9V 2A for camera/VTX, 12V option

BEC Vx 8A cont. 10A Peak for servos, 5V, 6V or 7.2V option

LDO 3.3V 200mA

INAV Target: MATEKH743

ArduPilot hwdef: MATEKH743

LAYOUT

	INAV AirPlane	INAV Multirotor	ArduPilot
S1	Motor	Motor	PWM1
S2	Motor	Motor	PWM2
S3	Servo	Motor	PWM3
S4	Servo	Motor	PWM4
S5	Servo	Motor	PWM5
S6	Servo	Motor	PWM6
S7	Servo	Servo	PWM7
S8	Servo	Servo	PWM8
S9	Servo	Servo	PWM9
S10	Servo	Servo	PWM10
S11	Servo	Motor	PWM11
S12	Servo	Motor	PWM12
LED	2812 LED	2812 LED	PWM13

Vx: BEC 5V/6V/7.2V for servos, Default is 5V
8A cont. Max.10A

AirS: Analog Airspeed sensor (0-6.6V)
1:1 voltage divider built-in
ARSPD_PIN 4

Rssi: Analog RSSI ADC, 0-3.3V
RSSI_ANA_PIN 8

VB2: Voltage divider 1K:20K, 0-69V
BATT2_VOLT_PIN 18
BATT2_VOLT_MULT 21


CU2: for external current sensor, 0-3.3V
BATT2_CURR_PIN 7

TX3/RX3: UART3
TX7/RX7: UART7
CTS7/Rts7: Uart7_CTS/RTS for ArduPilot Telem1

TX2/RX2: UART2
DA1 & CL1: I2C1_SDA, SCL, for compass

RX6: UART6-RX for Serial_RX by default
PPM share RX6 pad

TX6: UART6-TX

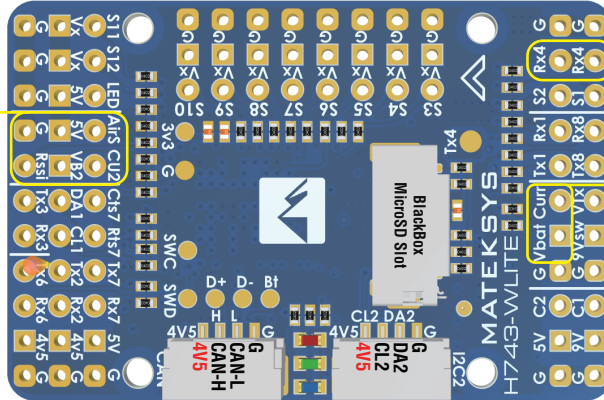

3.3: LD03.3V 200mA
D+ & D-: USB data
Bt: MCU Boot pin

CAN Port
CAN-H/L: CAN high/low
JST-GH-4P connector

I2C2 Port
DA2 & CL2: I2C2-SDA, SCL
JST-GH-4P connector

4V5: 4.4-4.8V, Max.500mA
*** the voltage is also supplied when connecting via USB
5V is not supplied when connecting USB only.

LED 0: Blue, FC Status
LED 1: Green, FC Status
LED 3.3: Red, 3.3V Status

Rx4: UART4_RX for ESC telemetry
DO NOT connect the ESC BEC output (Red wire in middle of connector) to Rx4 pad.

Tx4: UART4_TX

TX1/RX1: UART1
TX8/RX8: UART8

Vbat: Battery voltage
onboard battery voltage sense: BATT_VOLT_PIN 10, BATT_VOLT_MULT 21
INAV scale 2100

Curr: Current signal (0-3.3V)
onboard current sense: BATT_CURR_PIN 11, BATT_AMP_PERVLT 66.7
INAV scale 150

9V: 9V output, 9V will increase to 12V if "12V" jumper on bottom PDB is bridged.
9Vsw: 9V ON/OFF can be switched via ArduPilot Relay or Modes/USER1 (INAV)
Max.2A load on this pad. (Default ON)

5V: onboard BEC 5V 2A cont. Max.3A

G: Ground

VTX: Video OUT for Video Transmitter

C1: Camera-1 video IN (Default)



C2: Camera-2 video IN

*** C1/C2 can be switched via ArduPilot Relay or Modes/USER2 (INAV)


*** Two cameras should be set with identical video format, both PAL or both NTSC

DFU Button: DFU mode
Connect USB to the PC While holding the boot button in.

Red LED, USB power indicator

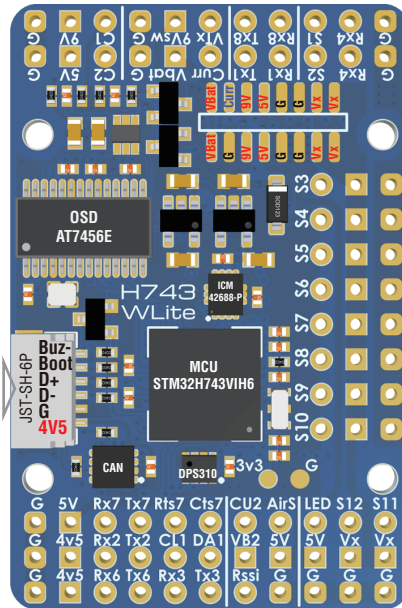


Size: 44x29x14.5mm
Weight: 22g w/ USB extender
Holes: Φ2mm, 25mm mounting

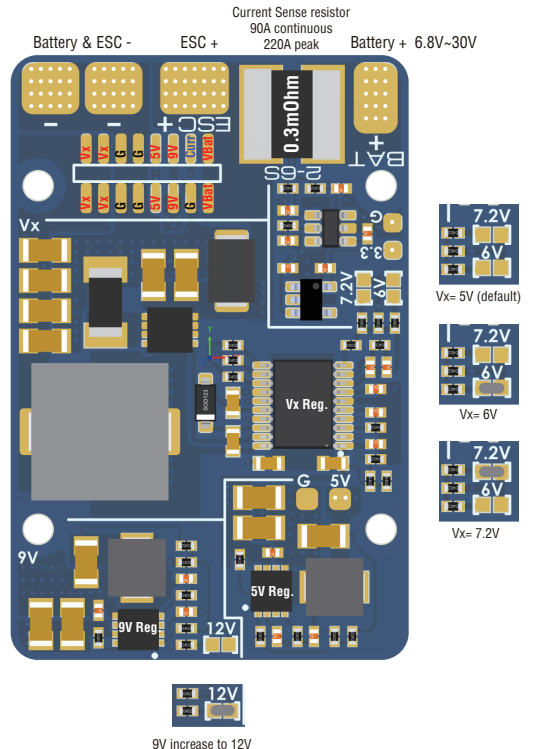


Wiring

INAV fw: MATEKH743
ArduPilot fw: MATEKH743

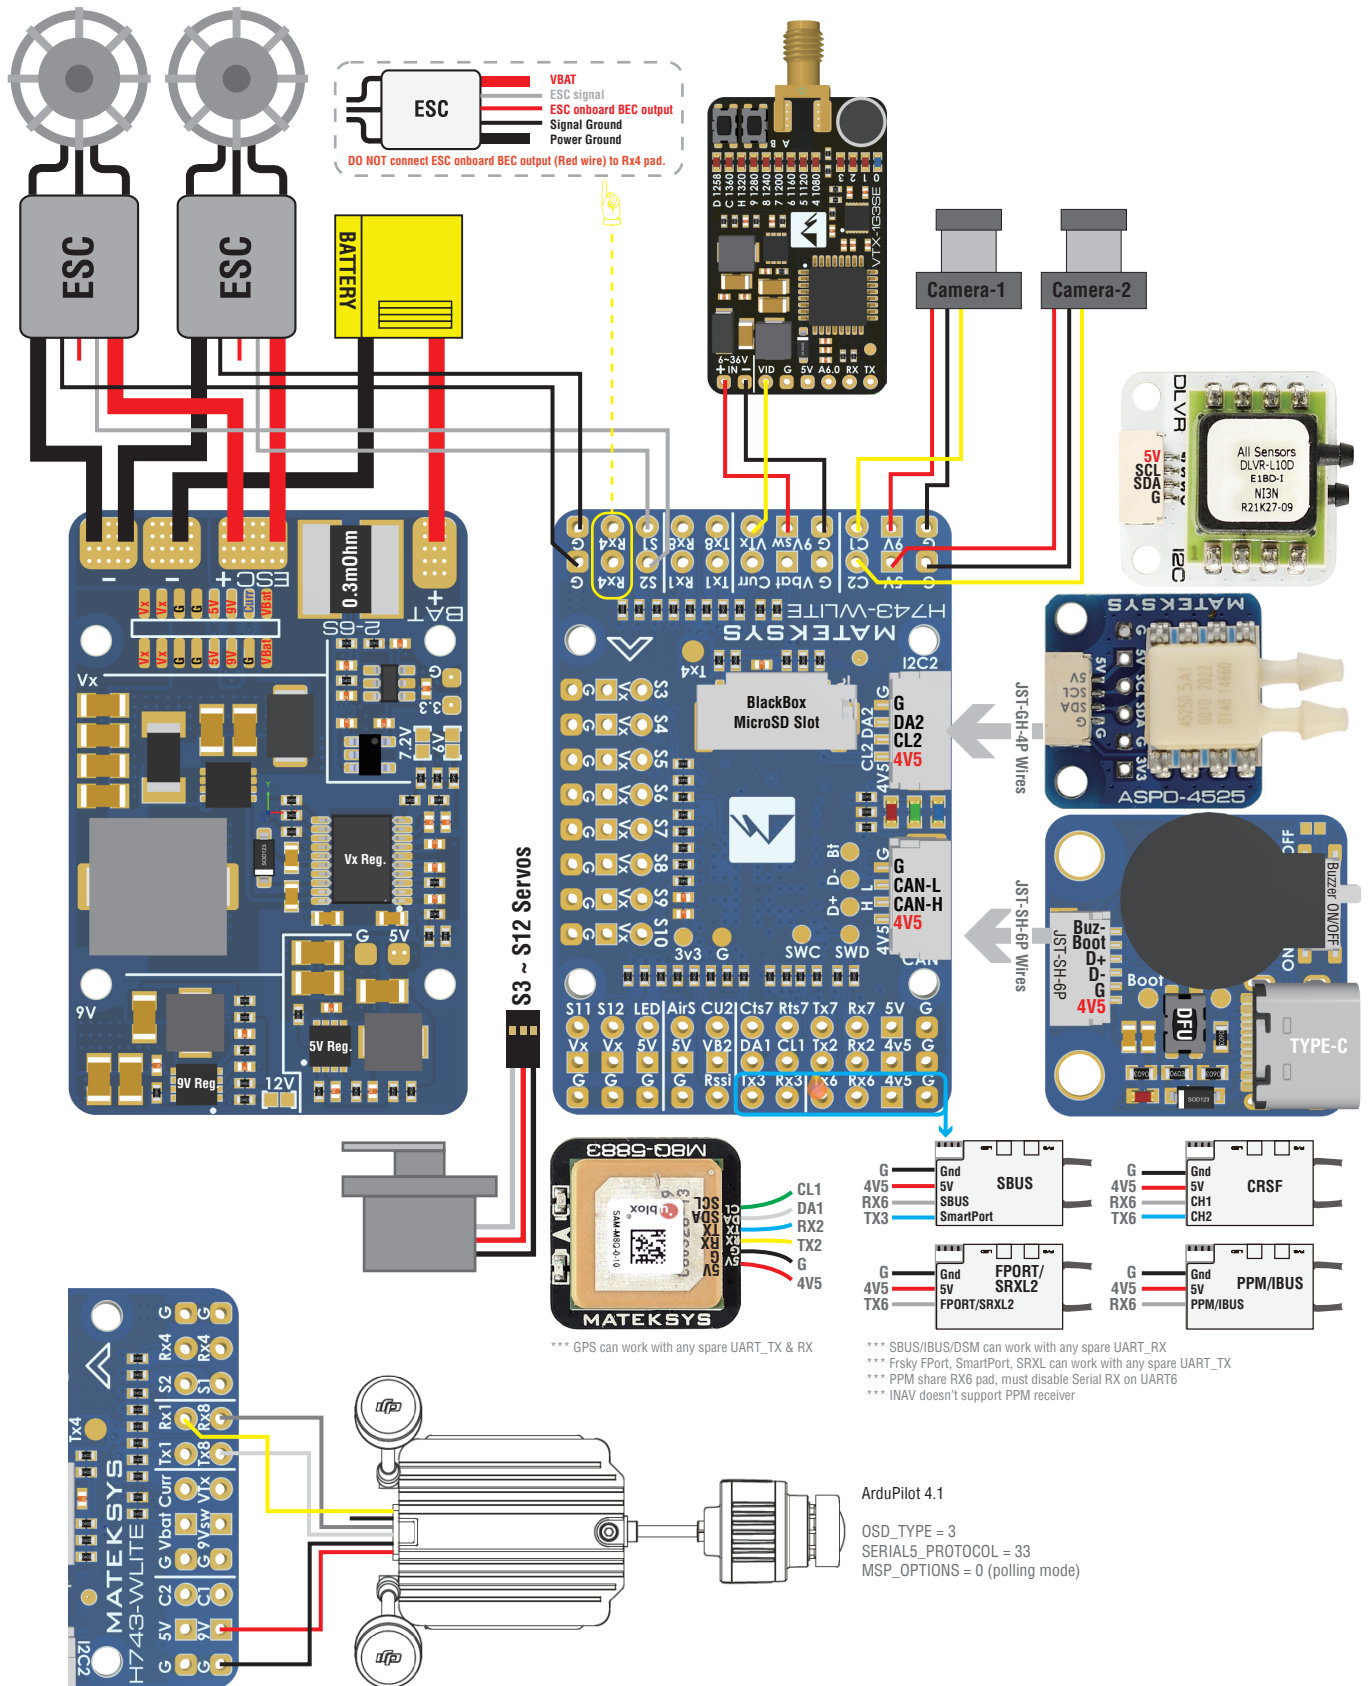

9Vsw Power / Camera switch

USER1	No USER1 definition 9Vsw ON by default
Add Range	
USER2	No USER2 definition C1 (Camera-1) ON by default
Add Range	

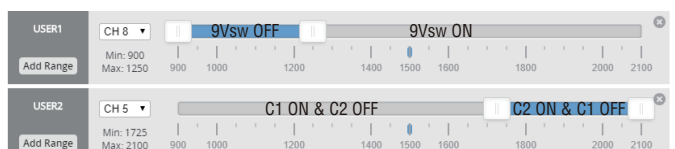

I/O Mapping

ArduPilot							
PWM	S1	PB0	5 V tolerant I/O	PWM1 GPIO50	TIM8_CH2N	Group1	
	S2	PB1	3.3 V tolerant I/O	PWM2 GPIO51	TIM8_CH3N		
	S3	PA0	5 V tolerant I/O	PWM3 GPIO52	TIM5_CH1		
	S4	PA1	5 V tolerant I/O	PWM4 GPIO53	TIM5_CH2	Group2	
	S5	PA2	5 V tolerant I/O	PWM5 GPIO54	TIM5_CH3		
	S6	PA3	5 V tolerant I/O	PWM6 GPIO55	TIM5_CH4		
	S7	PD12	5 V tolerant I/O	PWM7 GPIO56	TIM4_CH1	Gourp3	
	S8	PD13	5 V tolerant I/O	PWM8 GPIO57	TIM4_CH2		
	S9	PD14	5 V tolerant I/O	PWM9 GPIO58	TIM4_CH3		
	S10	PD15	5 V tolerant I/O	PWM10 GPIO59	TIM4_CH4	Group4	
	S11	PE5	5 V tolerant I/O	PWM11 GPIO60	TIM15_CH1		
	S12	PE6	5 V tolerant I/O	PWM12 GPIO61	TIM15_CH2		
		LED	PA8	5 V tolerant I/O	PWM13 GPIO62	TIM1_CH1	Group5
	SERVO13_FUNCTION 120, NTF_LED_TYPES neopixel						
PWM1~PWM13 are Dshot and PWM capable. However, mixing Dshot and normal PWM operation for outputs is restricted into groups, ie. enabling Dshot for an output in a group requires that ALL outputs in that group be configured and used as Dshot, rather than PWM outputs. If servo and motor are mixed in same group, make sure this group run lowest PWM frequency according to the servo specification. ie. Servo supports Max. 50Hz, ESC must run at 50Hz in this group.							
ADC	Vbat pad 1K:20K divider builtin	PC0	0~36V	Vbat ADC onboard battery voltage sense	BATT_VOLT_PIN BATT_VOLT_MULT	10 21.0	
	Curr pad	PC1	0~3.3V	Current ADC onboard current sense	BATT_CURR_PIN BATT_AMP_PERVLT	11 66.7	
	VB2 Pad 1K:20K divider builtin	PA4	0~69V	Vbat2 ADC	BATT2_VOLT_PIN BATT2_VOLT_MULT	18 21.0	
	CU2 Pad	PA7	0~3.3V	Current2 ADC	BATT2_CURR_PIN BATT2_AMP_PERVLT	7 /	
	RSSI Pad	PC5	0~3.3V	RSSI ADC Analog RSSI	RSSI_ANA_PIN RSSI_TYPE	8 1	
	AirS Pad 20K:20K divider builtin	PC4	0~6.6V	AirS ADC Analog Airspeed	ARSPD_PIN ARSPD_TYPE	4 2	
I2C	I2C1 CL1/DA1	PB6/PB7	5 V tolerant I/O	Compass	COMPASS_AUTODEC	1	
	I2C2 CL2/DA2 on JST-GH-4P	PB10/PB11	5 V tolerant I/O	on board Baro DPS310 Digital Airspeed I2C MS4525 DLVR-L10D	Address ARSPD_BUS ARSPD_TYPE ARSPD_TYPE	0x76 0 1 9	
CAN	CAN1	PD0/PD1	5 V tolerant I/O	CAN Node	CAN_D1_PROTOCOL CAN_P1_DRIVER	1 1	
				CAN GPS CAN Compass CAN Airspeed sensor	GPS_TYPE COMPASS_TYPMASK ARSPD_TYPE	9 0 8	
UART	USB	PA11/PA12	5 V tolerant I/O	USB	console	SERIAL0	
	RX7 TX7 RTS7 CTS7	PE7/8/9/10	3.3 V tolerant I/O	UART7	telem1	SERIAL1	
	TX1 RX1	PA9/PA10	5 V tolerant I/O	USART1	telem2	SERIAL2	
	TX2 RX2	PD5/PD6	5 V tolerant I/O	USART2	GPS1	SERIAL3	
	TX3 RX3	PD8/PD9	5 V tolerant I/O	USART3	GPS2	SERIAL4	
	TX8 RX8	PE1/PE0	5 V tolerant I/O	UART8	USER	SERIAL5	
	TX4 RX4	PB9/PB8	5 V tolerant I/O	UART4	USER	SERIAL6	
	TX6 RX6	PC6/PC7	5 V tolerant I/O	USART6	RC input/Receiver	SERIAL7	
				RX6	SBUS/IBUS/DSM/PPM		
TX6				FPORT/SRXL2			

iNAV					
PWM	S1	PB0	5 V tolerant I/O	TIM3_CH3	Fixed Wing Motor
	S2	PB1	3.3 V tolerant I/O	TIM3_CH4	
	S3	PA0	5 V tolerant I/O	TIM5_CH1	
	S4	PA1	5 V tolerant I/O	TIM5_CH2	Fixed Wing Servo
	S5	PA2	5 V tolerant I/O	TIM5_CH3	
	S6	PA3	5 V tolerant I/O	TIM5_CH4	
	S7	PD12	5 V tolerant I/O	TIM4_CH1	
	S8	PD13	5 V tolerant I/O	TIM4_CH2	
	S9	PD14	5 V tolerant I/O	TIM4_CH3	
	S10	PD15	5 V tolerant I/O	TIM4_CH4	
	S11	PE5	5 V tolerant I/O	TIM15_CH1	
	S12	PE6	5 V tolerant I/O	TIM15_CH2	
	LED	PA8	5 V tolerant I/O	TIM1_CH1	2812LED
ADC	Vbat pad 1K:20K divider builtin	PC0	0~36V	Vbat ADC ADC_CHANNEL_1	scale 2100
	Curr Pad	PC1	0~3.3V	Current ADC ADC_CHANNEL_2	scale 150
	RSSI Pad	PC5	0~3.3V	RSSI ADC ADC_CHANNEL_3	Analog RSSI
	AirS Pad 20K:20K divider builtin	PC4	0~6.6V	AirS ADC ADC_CHANNEL_4	Analog Airspeed
	VB2 Pad 1K:20K divider builtin	PA4	0~69V	ADC_CHANNEL_5	scale 2100
	CU2 Pad	PA7	0~3.3V	ADC_CHANNEL_6	spare
I2C	I2C1 CL1/DA1	PB6/PB7	5 V tolerant I/O	Compass	QMC5883 / HMC5883 IST8310 / IST8308 MAG3110 / LIS3MDL
	I2C2 CL2/DA2 on JST-GH-4P	PB10/PB11	5 V tolerant I/O	OLED	0.96"
				onboard Barometer	DPS310
UART	USB	PA11/PA12	5 V tolerant I/O	USB	
	TX1 RX1	PA9/PA10	5 V tolerant I/O	USART1	telem2
	TX2 RX2	PD5/PD6	5 V tolerant I/O	USART2	GPS1
	TX3 RX3	PD8/PD9	5 V tolerant I/O	USART3	GPS2
	TX4 RX4	PB9/PB8	5 V tolerant I/O	UART4	USER
	TX6 RX6	PC6/PC7	5 V tolerant I/O	TX6 & RX6	CRSF
				UART6_RX	SBUS/IBUS/DSM/PPM
				UART6_TX	FPORT/SRXL2
	RX7 TX7	PE7/PE8	3.3 V tolerant I/O	UART7	telem1
	TX8 RX8	PE1/PE0	5 V tolerant I/O	UART8	USER